

CYBOX RT 2-A

AUTOMOTIVE WIRELESS ROUTER WITH LTE CAT-6 AND WI-FI 5

ELTEC systems

WESTERMO

MADE
IN
GERMANY



KEY FEATURES

- Up to two LTE interfaces for channel-bundled WAN access
- Up to two SIM cards for each LTE interface
- Up to two IEEE802.11ac Wi-Fi interfaces
- Integrated 5-port Gigabit Ethernet switch
- Simultaneous Wi-Fi operation on 2.4 GHz and 5 GHz bands
- Up to two sockets for expansions (CAN, Wi-Fi, RS232 and more)
- Optional internal SSD storage up to 960 GB
- Integrated automotive power supply 12 to 24 VDC
- Integrated GNSS
- Built-in cyber security
- Maintenance-free design
- -40 °C to +75 °C operating temperature
- E1 compliant

TYPICAL APPLICATIONS

- Passenger Wi-Fi
- Passenger Entertainment
- Passenger Information
- Vehicle-to-Ground Communication
- Vehicle Data Logging

HIGH-END WIRELESS COMMUNICATION

The CyBox RT 2-A is a robust wireless communication router for automotive applications. It offers stable, secure, and broadband LTE connections for data exchange via vehicle-to-ground connections and high-speed internet. The device hosts multiple LTE interfaces for parallel LTE channel use and thus maximized throughput, multiple Wi-Fi interfaces to connect to client devices such as mobile phones, as well as five Gigabit Ethernet ports to attach the device to a backbone network. Country-specific LTE and Wi-Fi standards are adopted for worldwide use in every type of vehicle.

MULTIPLE RADIOS

There is mounting space for up to four radio modules within the CyBox RT 2-A. The radios can operate in different standards, including LTE and its predecessors. Each LTE module can be provided with up to two SIM cards for an optimal net coverage and maximum provider flexibility. The Wi-Fi interfaces allow for connecting clients at high data rates on each interface to boost network efficiency and maximize data throughput.


MEDIA SERVER

To enhance the CyBox RT 2-A media server capabilities with internal storage, mounting space for a M.2 solid state drive is supplied. It is attached to the CPU's dedicated SATA port and can be used for streaming local, on-vehicle video and audio data.

USER-INTERFACE AND SECURITY FEATURES

The CyBox RT 2-A firmware provides a convenient management interface via a web service. Besides global setup parameters the open source software OpenWrt allows the configuration of the radio interfaces, including provider information and the login dialog, as well as the setup of the stateful firewall. The access point and router configurations as well as the management firmware can be updated remotely. Furthermore, the built-in fully configurable stateful firewall and multi-VPN support with hardware-accelerated encryption ensures communication security.

BLOCK DIAGRAM

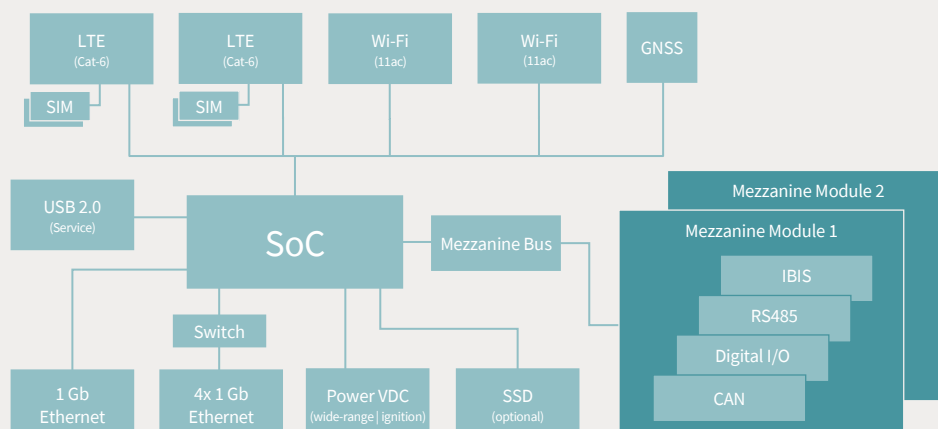

CYBOX RT 2-A

AUTOMOTIVE WIRELESS ROUTER WITH LTE CAT-6 AND WI-FI 5

ELTEC

systems

WESTERMO

TECHNICAL DATA

PHYSICAL INTERFACES

System Architecture	Dual-Core CPU, 1200 MHz
Software	Linux OS OpenWrt
Antenna	QLS connectors
LAN	5x 10/100/1000BaseT(X), RJ45
USB	USB Type-A, USB 2.0
Power Input	3-pin male / ignition contact
Reset Switch	available on the front panel

ELECTRICAL SPECIFICATIONS

Power Supply	12 to 24 VDC, wide-range power supply (compliant to E1)
Interruptions of Voltage Supply	compliant to ISO 16750-2
Power Consumption	12 W typ., 30 W max.

ENVIRONMENTAL CONDITIONS

Ambient Temperature	-40.. +75 °C (+65 °C when using an SSD) operating, -40.. +85 °C storage
Humidity	max. 95 % non-condensing operating and storage
Altitude	up to +2000 m

RELIABILITY

MTBF	approx. ~220.000 h
------	--------------------

MECHANICAL SPECIFICATIONS

Dimensions	251 (284) mm x 70 mm x 170 mm (w h d), (width mounting points)
Weight	up to 2800 g
Housing	IP40, aluminum, wall-mount, conductive cooling

STANDARD CONFIGURATIONS

ART. NO.	MODEL	DESCRIPTION
3203-0000	CYRTA-2000	2x LTE, 2x Wi-Fi 802.11ac, 5x 1 Gb ETH (RJ45), QLS, 120 GB SSD, CAN, GNSS
3203-0010	CYRTA-2010	1x LTE, 2x Wi-Fi 802.11ac, 5x 1 Gb ETH (RJ45), QLS, GNSS
3203-0050	CYRTA-2100	2x LTE, 2x Wi-Fi 802.11ac, 5x 1 Gb ETH (RJ45), FAKRA, 120 GB SSD, CAN, GNSS

Further models and information on www.westermo.com and www.eltec.com

MODULES

LTE INTERFACE CAT-6 ADVANCED

Transfer Rates	up to 300 Mbps download / 50 Mbps upload
4G (LTE) Bands	B1, B2, B3, B4, B5, B7, B12, B13, B20, B25, B26, B29, B30, B41
3G Bands	B1, B2, B3, B4, B5, B8
Antenna	with Diversity and MIMO

WI-FI INTERFACE IEEE 802.11 a/b/g/n/ac

Transfer Rates	up to 1300 Mbps
Frequency Range	2.412 GHz to 2.472 GHz, or 4.920 GHz to 5.825 GHz, selectable band
RF	3x RF antennas, 3x3 MIMO technology
Encryption	AES, TKIP, WPA, WPA2
Operational Feature	up to 128 clients per radio
Security	stateful firewall with multi-level client isolation

GNSS INTERFACE

Frequency Band	GPS (L1), GLONASS (L1, FDMA), Galileo (E1) ready, Beidou
Protocol Standards	NMEA, RTCM 104
Accuracy	up to 1.5 m
Time To First Fix	cold start < 35 s, warm start 1 s

STANDARDS AND SPECIFICATIONS

Standards	ISO 16750-1, -2, -3, -4, -5
E1 Type Approval	UN ECE R10, R118
RED - 2014/53/EU	EMC radio spectrum health & safety

OPTIONS

Modules	various combinations of Wi-Fi and LTE modules
Antenna Connectors	FAKRA
Interfaces	CAN IBIS, RS232, RS485, ODB2, digital I/O (future)
Evaluation Kit	available

Westermo Network Technologies AB
Metallverksgatan 6
72130 Västerås
Sweden

FON +46 16 42 80 00
FAX +46 16 42 80 01
EMAIL info@westermo.com
WWW westermo.com

Copyright © 2020 by ELTEC Elektronik AG, Mainz.
All trademarks are the property of their owners. All rights reserved.

Revision: 3.1 | Date: 30.08.2021